

Lanyard Attachment Instructions

The SEEK TIC's integrated lanyard loop is not durable enough for fire fighting environments.

A lanyard attachment utilizing a D-ring and integrated mounting holes provides a solid attachment point. The Adhesive Pad Eye controls the hanging orientation of the camera.



1. Attach D-ring w/ screws

2. Clean housing with alcohol swab

3. Attach Pad Eye with Adhesive Pad as pictured at right.

Note: Attach to plastic housing, avoiding rubber pad.

4. Allow adhesive to set for 12 hours



5720 Nicolle St.
Ventura, CA 93003
(888) 588-9981 / (805) 658-9922
www.gearkeeper.com
info@gearkeeper.com

Belt Clip Attachment Instructions



To Install: Hold Gear Keeper in palm of one hand and catch metal *Tang* on belt and spread belt clip to clear metal *Catch*. Be sure *Catch* fully clears belt.

To Remove: Hold Gear Keeper in palm of one hand and spread belt clip to clear *Catch*.

Use other hand to push *Tang* down to clear belt and remove.


Warning: Avoid opening Belt Clip more than 1/2 " to prevent loss of clip memory.



5720 Nicolle St.
Ventura, CA 93003
(888) 588-9981 / (805) 658-9922
www.gearkeeper.com
info@gearkeeper.com

Velcro Strap Attachment Instructions

- A. Slide Moveable Loop up against Fixed Loop; then feed Velcro Strap through Retainer and back up through Moveable Loop.**
- B. Pull up on Velcro Strap so that loops cinch down on Retainer.**
- C. Feed Velcro Strap around belt or belt loop; then back through Fixed Loop.**
- D. Affix Velcro Strap back on itself.**

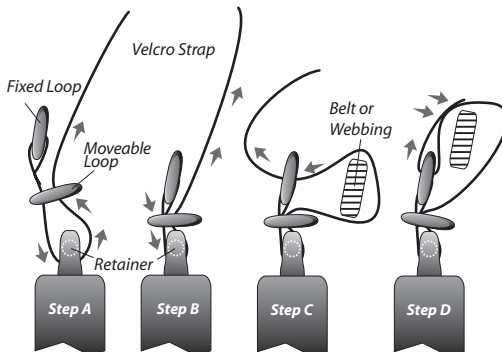

5720 Nicolle St.
Ventura, CA 93003
(888) 588-9981 / (805) 658-9922
www.gearkeeper.com
info@gearkeeper.com

▶ Phone Attachment Instructions


Option 1 Mount directly to phone or smooth case surface with 3M® Adhesive Pad Eye mount



Attach Pad Eye to Surface

- 1 Clean surface and pad eye with alcohol swab
- 2 Attach pad eye with adhesive and press firmly
- 3 Adhesive bond strength increases over time. For best results, install 24 hours prior to use (bond strength 50% after 20 minutes, 90% after 24 hours).

Option 2 Attach to lanyard loop on phone case as shown here.



WARNING: If mounting to a phone case, insure the case is substantial enough such that phone will not fall out if dropped.

▶ Belt Clip Attachment Instructions



To Install: Hold Gear Keeper in palm of one hand and catch metal *Tang* on belt and spread belt clip to clear metal *Catch*. Be sure *Catch* fully clears belt.

To Remove: Hold Gear Keeper in palm of one hand and spread belt clip to clear *Catch*. Use other hand to push *Tang* down to clear belt and remove.

Warning: Avoid opening Belt Clip more than 1/2" to prevent loss of clip memory.

WARNING: Avoid opening clip more than 1/2" to prevent loss of clip memory.



5720 Nicolle St.
Ventura, CA 93003
(888) 588-9981 / (805) 658-9922
www.gearkeeper.com
info@gearkeeper.com